


Primary Rolling Crusher

- This equipment is mainly used for crushing soft materials.
- The materials can be crushed to granules smaller than 5mm.



Crushing soft materials

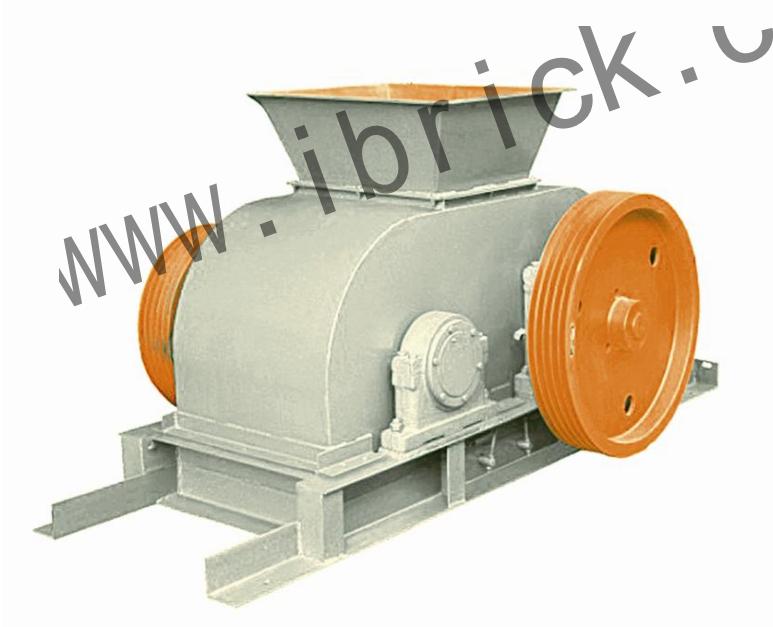

Send the crushed materials to the next process



The scraper under the crusher can prevent the crushed materials paste on the roller thus to ensure normal operation.

Primary structure: electromotor, roller ring, scraper, roller

Equipment advantages: the lumpy raw material entered the primary rolling crusher is extruded into less than 5mm granular raw material to enhance plasticity and uniformity of raw material. It can play a vital role to increase the product quantity when extruding tablet tile products and hollow brick products.

Equipment parameters:

Model	Production Capacity (m3 /h)	Equipped Power (KW)	Dimension (mm)
SGP100*80	35-45	Y6-30*2	2790*1335*1155
SGP80*60	30-40	Y6-18.5*2	2680*1335*1140
SGP70*50	25-35	Y6-15*2	2450*1120*1120
SGP60*60	20-25	Y6-11*2	2200*1120*1100
SGP50*50	15-20	Y6-7.5*2	2000*1000*900

IBRICK supply multiple types of crusher suitable for your materials and production capacity, our products apply in Russia, Kazakhstan, Uzbekistan, India, Bangladesh, Egypt, Angola, Mexico, Chile, Peru, Brazil and other countries.

www.ibrick.cc

Shaanxi Ibrick Technology Co., Ltd

**Add: Rm-B21811, Fortune Plaza, High-Tech
3rd Rd, High-Tech Zone, Xi'an, China**

Tel: 0086-29-63364175

Fax: 0086-29-63364165

Mob: 0086 15991710216

E-mail: info@ibrick.cc

www.ibrick.cc

www.ibrick.cc